

Foshan MexyTech Co., Ltd

TEST REPORT

REPORT NUMBER

180206062GZU-003

ISSUE DATE

2018/3/9


PAGES

4

DOCUMENT CONTROL NUMBER

TRF-PERF02-EN-b

© 2017 INTERTEK

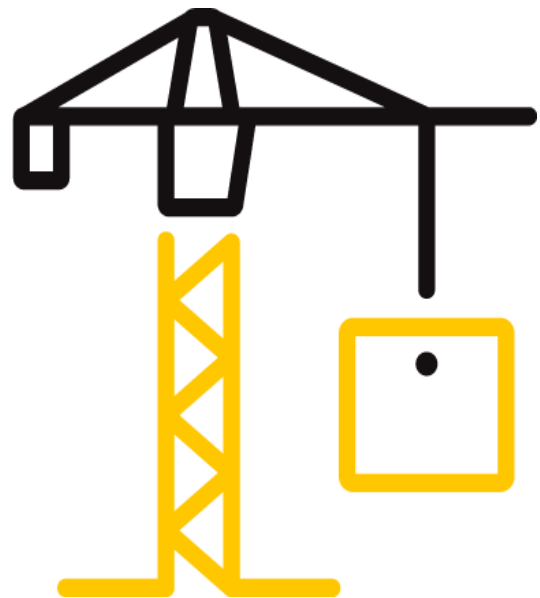

Test Report

Issue Date: 2018/3/9 Intertek Report No. 180206062GZU-003

Applicant: Foshan MexyTech Co., Ltd

Applicant Address: No.2-8 Building B,Torch Innovation Park, Jihua 2 Road, Chancheng District, Foshan City, Guangdong Province, China

Attn: Junming Feng

SUBJECT: Performance testing
<<WPC Fence>>

Dear Sir,

This test report for represents the results of our evaluation of the above referenced product(s) to the requirements contained in the following standards:

TEST METHODS AND STANDARDS	
Refer to the next following Pages.	

SAMPLE ID	PRODUCT NAME	MODEL	SPECIFICATION	Brand
S180206062-016~024	WPC Fence	Privacy Fence	1800x1800	Mecofence

SAMPLE RECEIEVED: 2018/2/6
TESTED FROM: 2018/2/6 TO 2018/3/9

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Test Report

Issue Date: 2018/3/9

Intertek Report No. 180206062GZU-003

Test Items, Method and Results:


No.	Test Item	Test Parameter	Test Result	Verdict
1	Wind resistance test	Test method: Client's requirements Requirements: The fencing system shall resist a maximum horizontal quarter point load of 372,1 N/m ² x effective area of system (as 9 Beaufort scale or 9 wind level)	There was no failure, nor any evidence of disengagement of any component, nor visible cracks in any component	Pass

Test Report

Issue Date: 2018/3/9

Intertek Report No. 180206062GZU-003

APPENDIX A: PHOTOS

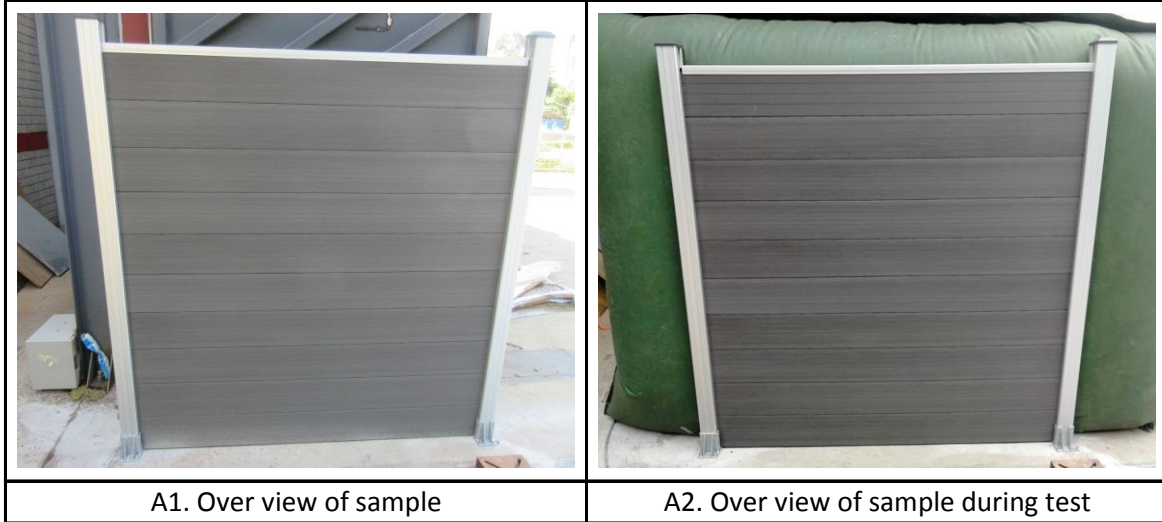

REPORT AUTHORIZED

When signed with physical or electronic signature, the contents of this report have been prepared and approved per Intertek's quality process in accordance with ISO 17025.

Name: Martin Guo
Title: Reviewer

Name: Kelming Wang
Title: Senior Project Engineer

Revision:

NO.	DATE	CHANGES	AUTHOR	REVIEWER
180206062GZU-003	2018/3/9	First issue	Kelming Wang	Martin Guo